

MF 3000

Mass flow measurement for bulk materials



HUMY 3000
Moisture
measurement

MF 3000
Mass flow
measurement

FS 510M
Microwave
mass flow
monitoring

FS 600E
Electrostatic
mass flow
monitoring

FS 700E
Triboelectric
dust monitoring

LC 510M
Limit level
monitoring

Application and Function


Our solid flow meter MF 3000 is designed for flow measurement in metallic pipes from a few kg/h to many t/h. The system is suitable for on-line measurements of powders, dusts, pellets, and granules from 1 nm up to 2 cm in pneumatic or free fall conditions.

The measurement principle of the MF 3000 is based on the physical Doppler-Effect, whereas the sensor generates a uniform field in the microwave frequency range inside the pipe. These microwaves are being reflected by particles passing through the pipe. Calculation

of frequency and amplitude changes allows for accurate determination of solid flow. Non-moving particles like dust accumulation are excluded from the calculation.

The installation is simple and cost effective via a welded branch, through which the sensor is screwed flush to the inside of the pipe. The sensor is connected to a DIN-rail mounted transmitter with 4...20 mA, RS232 and RS485 output. The calibration is easy by using our MF-SMART software and a reference flow value.


Main Benefits

- ◆ For pneumatic conveyors and free falling processes
- ◆ For all solid materials from a few kg/h to many t/h
- ◆ No armatures inside the pipe and inside flush fitting
- ◆ Very fast and contactless measurement
- ◆ Easy, quick and cost effective installation and start-up
- ◆ Galvanic separated DIN-Rail Transmitter with RS232- and RS485-Interface
- ◆ Robust stainless steel version, abrasion and maintenance free
- ◆ Limit value monitoring with alarm contact
- ◆ Sensor-transmitter distance up to 2.000 m
- ◆ Easy and quick calibration
- ◆ Adjustable sensitivity
- ◆ Optional: ATEX for Zone 20 and Zone 2 

Putting into work

A branch is welded onto the pipe. A 18 mm hole is drilled, the sensor is mounted flush with the inner diameter of the pipe. For commissioning and calibration a notebook with our MF-SMART software needed.

Calibration can be performed with either one or multiple reference flow amounts. The measurement value is output either analog or as digital signal. A serial COM interface is available at the front of the transmitter to connect a notebook computer and a RS485 interface for connection to a PLC system.

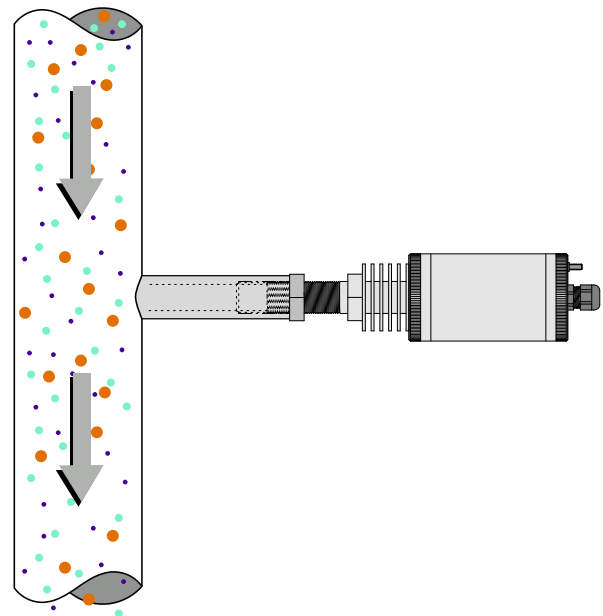

Application examples of successfully measured products

MF 3000 is measuring in pneumatic transportations and free falling processes. The product's grain size can be between 1 nm and 20mm.

The moisture of the measured material is allowed to be changed up to 12%.

Materials:

All dust, powders, granulates, panels, threads etc. Also sticking or abrasive materials

Industries:

Animal feed industry
 Building materials industry
 Cement industry
 Chemical industry
 Detergent industry
 Engineering companies
 Food industry
 Glass production
 Metal production

Range of detection:

from kg/h to many t/h

Pharmaceuticals
 Pigment production
 Plastic industry
 Production of ceramics
 Production of rubber goods
 Production of textiles
 Tobacco industry
 Washing powder industry


Applications



Wood Dust




Jet Material

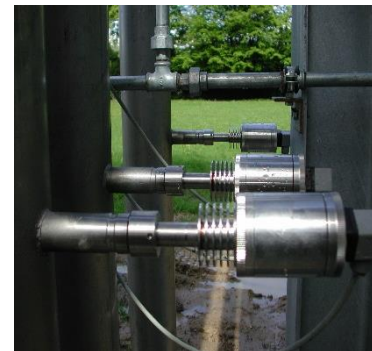

Plastic Granules



Coal Dust

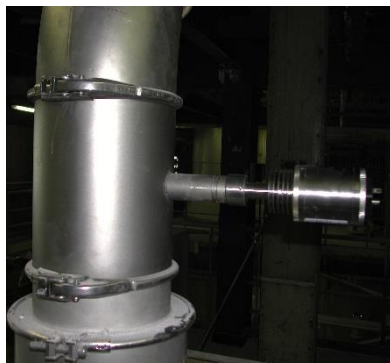

Fertilizer



Iron-II-Sulfate

HUMY 3000
 Moisture
 measurement

MF 3000
 Mass flow
 measurement

FS 510M
 Microwave
 mass flow
 monitoring

FS 600E
 Electrostatic
 mass flow
 monitoring

FS 700E
 Triboelectric
 dust monitoring

LC 510M
 Limit level
 monitoring

Process Data

MF 3000

Measurement start free fall :	Ca. 1 kg/h
Measurement start pneumatic transport	Ca. 1 kg/h
Max. pipe diameter	DN 300 (bigger diameter on request)
Grain size	1 Nanometer up to 20 mm
Moisture	Depending on the product
Pressure	Up to 6 bar (Option up to 30 bar)
Process temperature	-20 up to +90°C (Option up to +750°C)

Technical Data

Sensor


Medium touched parts	Stainl. steel 1.4307 and PA 6.6
Process connecting	Welding flange
Housing material	Stainl. steel 1.4307 or ST52
Protection class	IP 65
Power supply	Via transmitter

Technical Data


Transmitter

Construction	DIN-Rail, 22,5 mm
Auxiliary energy	24 V AC/DC
Power consumption	Max. 2W (+0,3 – 8,5W for thermocouple)
Ambient temperature	-10 to +60°C
Protection class	IP 30

Communication Unit (Optional)

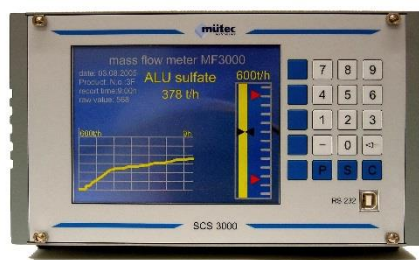


System components

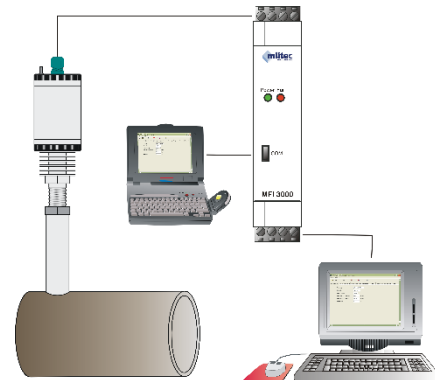

A complete measuring system MF3000 contains the sensor, a cable, a DIN-rail transmitter and the software MF-SMART .

Sensor

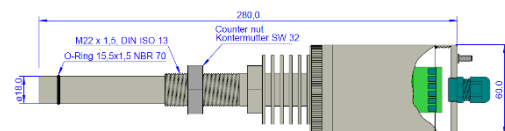

Transmitter

